

SUPPL (NO)

INTERFACE VALVE


Valve Operation


MV 29A10K2W-1/4NO-1/4E-1/4P-H & MV 29A10K2W-3/8NO-3/8E-1/4P-H are 2-Way Normally Open, Pilot Supply pressure Operated Interface Valves.

The valve designed to open incoming supply pressure from IN to EX port (As per below Status Table State 2) when there is Pilot pressure present. With pilot pressure applied, IN pressure is block to EX port (AS per below Status Table State 1). A loss of Pilot Supply pressure will open and vent supply pressure from IN port to EX port.

Flow Control Status Table

STATE	IN	EX	PILOT
1	0	-	0
2	0	0	-

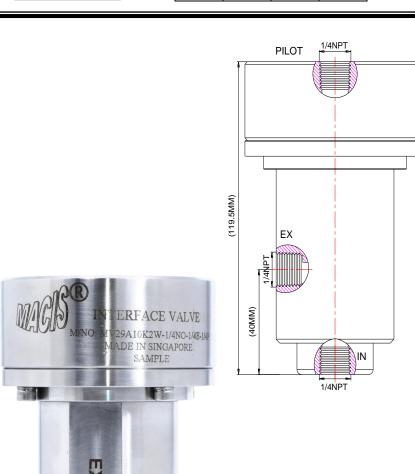

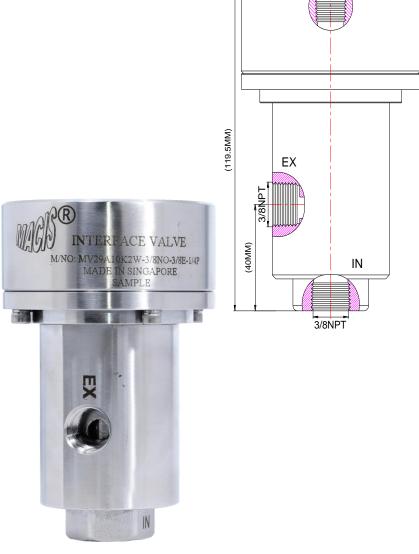

PILOT

Ordering Ref: MV 29A10K2W-1/4NO-1/4E-1/4P-H Ordering Ref: MV 29A10K2W-3/8NO-3/8E-1/4P-H

Specification

Specification	Specification				
Control Application	2-Way Normally Open Auto Operation Type	Distinctions			
Pilot Linker Shape	Circular Ø76.2mm (3")	Ordering Ref No: MV29A10K2W-1/4NO-1/4E-1/4P-H			
Net Weight	2.4 KG				
Proof Working Media	Oil	Port Connection Size: IN, EX & Pilot Ports: 1/4"NPT F			
Pilot Pressure Range	40–150 PSI (2.8 -10.3 bar)				
Max Working Pressure	10,000 PSI (689.4 bar)				
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	Ordering Ref No: MV29A10K2W-3/8NO-3/8E-1/4P-H			
Material(Valve Body)	316 L	Port Connection Size: IN & EX Ports: 3/8"NPT F, Pilot Port: 1/4"NPT F			
Seal Material	Nitrile Rubber(NBR) Other Seal Material are Available Upon Request				
Flow Rate	Cv = 0.36				

^{**} Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.