

## **PILOT VALVE**

## **Valve Operation**


MV29171-54H-C & MV29171-55H-C are 3-way 2-position Normally Closed Auto Reset Pilot valves. Pressure signal applied to Pilot Port to operate the valve.


The pressure signal to Pilot port within the required minimum pilot pressure range, the valve will actuate to open the supply pressure from IN port to OUT port and block the EX port, as per Status table (State 2).

When pilot port pressure signal lower than the minimum pilot pressure range required, the valve will spring return to close as per Status table (State 1). Supply pressure at IN port will be block, and the valve will vent the system pressure from OUT port to EX port.

## **Flow Control Status Table**

STATE	IN	OUT	EX	PILOT
1	-	0	0	-
2	0	0	-	0

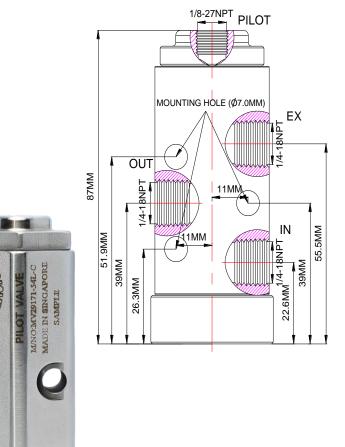

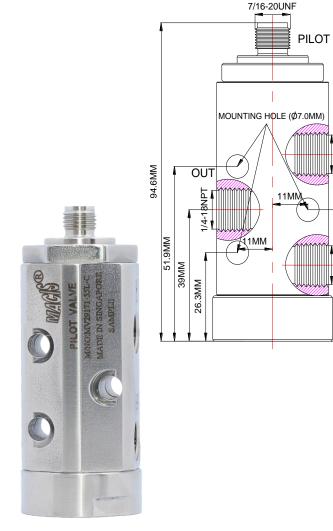

Ordering Ref: MV29171-54H-C

Ordering Ref: MV29171-55H-C (Without Ferrule & Nuts)

MV29171-55H-C-P1/4OD (With Ferrule &Nuts)

55.5MM

22.6MM

## **Specification**

<del>- Cpoomouton</del>			
Control Application	3-Way 2-Position Normally Closed Auto Reset Type (Pilot Operated Spring Return)	Distinctions	
Exterior Shape	Hexagon A/F34.9 mm (1 <sup>3</sup> / <sub>8</sub> " )	Ordering Ref No: MV29171-54H-C	
Mounting Hole Size	Ø7.0 mm( <sup>9</sup> / <sub>32</sub> ")		
Net Weight	600 gm	Port Connection Size: IN , OUT & EX Ports : ¼"-18NPT F, Pilot Port : 1/8"-27NPT F	
Working Media	Oil		
Pilot Pressure Range	30 - 120 PSI (2.1 - 8.2 bar)		
Max Working Pressure	200 PSI (13.7 bar)	Ordering Ref No : MV29171-55H-C  Port Connection Size : IN , OUT & EX Ports : 18NPT F, Pilot Port : 7/16"-20UNF M	
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory		
Material(Valve Body)	316 L		
Seal Material(Standard)	Nitrile Rubber(NBR) Other Seal Material are Available Upon Request		
Flow Rate	Cv = 1.6		

<sup>\*\*</sup> Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.