

## **RELIEF VALVE**


## Model: MV 9466-6KH (Pressure Range 1,000-6,000psi)

## **Descriptions**


Relief valves (Pressure Safety Valves) are designed or set to open at a predetermined set pressure to protect other equipment from being subjected to pressures that exceed their design limits.

The pressure media enters the relief valve, turning the spring housing clockwise will increase the relief valve pressure setting. Rotating the spring housing counterclockwise will decrease the relief valve pressure setting. When the set pressure is exceeded, the valve is forced open. They have excellent pressure relief and reset repeatability.

- —Leak tight when 90% of "set pressure" is applied.
- —Repeatability ±5% of "set pressure".
- -Re-seating within 20-30% of "cracking pressure". State details when ordering

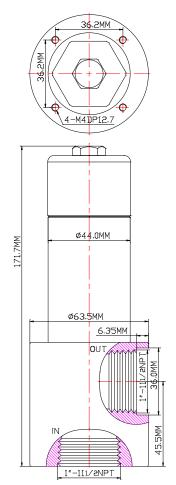



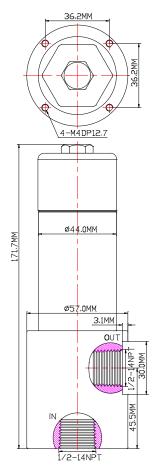

Ordering Ref: MV9466-6KH-I1/2NPTF-O1/2NPTF

## Specification

Control Application	2-Way, Two Position Normally Closed, Spring / Poppet Operated Used to control or limit the pressure in a system	Distinctions
Pressure Range	1,000-6,000 PSI (69.0-413.7 bar)	Ordering Ref No: MV 9466-6KH-I1''NPTF-O1''NPTF
Orifice Size	Ø 4.3 mm( <sup>11</sup> / <sub>64</sub> ")	
Flow Rate	Cv = 0.7	Port Connection Size: IN & OUT Ports 1"-11 1/2NPT F
Net Weight	2.0kg	Ordering Ref No: MV 9466-6KH-I1/2NPTF-O1/2NPTF
Working Media	Oil	9 100 0 12, 2 11 0 2, 2 11
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	Port Connection Size : IN & OUT Ports 1/2"-14NPT F
Material(Valve Body)	316 L	
Seal Material	Nitrile Rubber(NBR) Other seal material are available upon request	
Options	Body Material and end connections other option available upon request	

<sup>\*\*</sup>Optional Parts/Material are available upon request.