





www.macis.com.sg


NEEDLE VALVE (Straight Pattern)

Descriptions


The needle valve is used to make relatively fine adjustments in the amount of fluid flow. They are often used as component parts of other valves, to shut off the flow of the process media to the pressure instrument. The characteristic of this valve is the long, tapered, needle like point on the end of the valve stem. This "needle" acts as a disk. The longer part of the needle is smaller than the orifice in the valve seat and passes through the orifice before the needle seats. This arrangement permits a very gradual increase or decrease in the size of the opening in a needle valve. Therefore, the valve can provide fine flow adjustments. The number of handle turns can be directly correlated to the amount of flow.

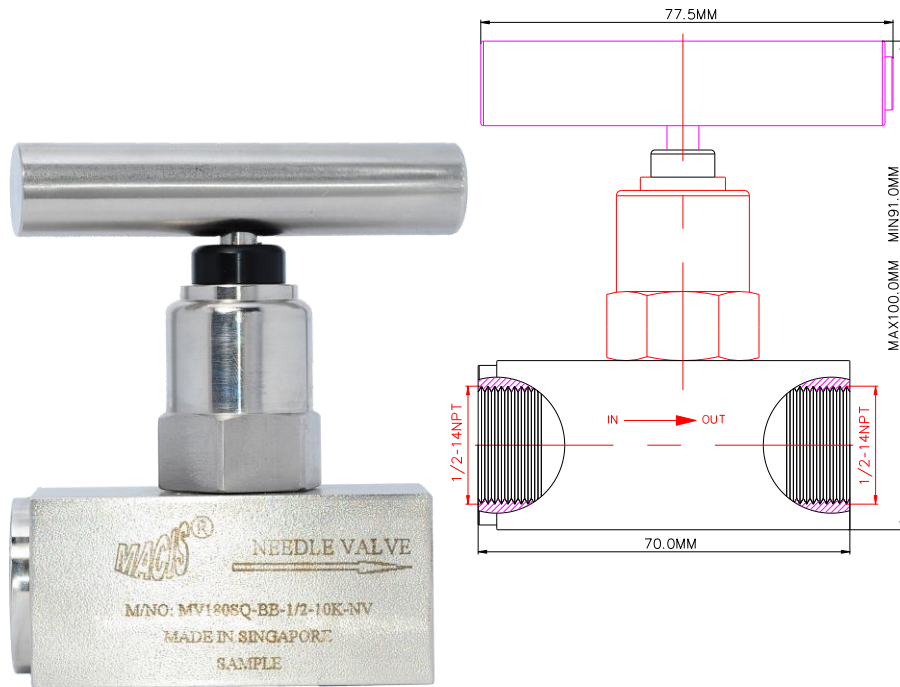


Ordering Ref : MV 180SQ-BB-1/2-10K-NV-H

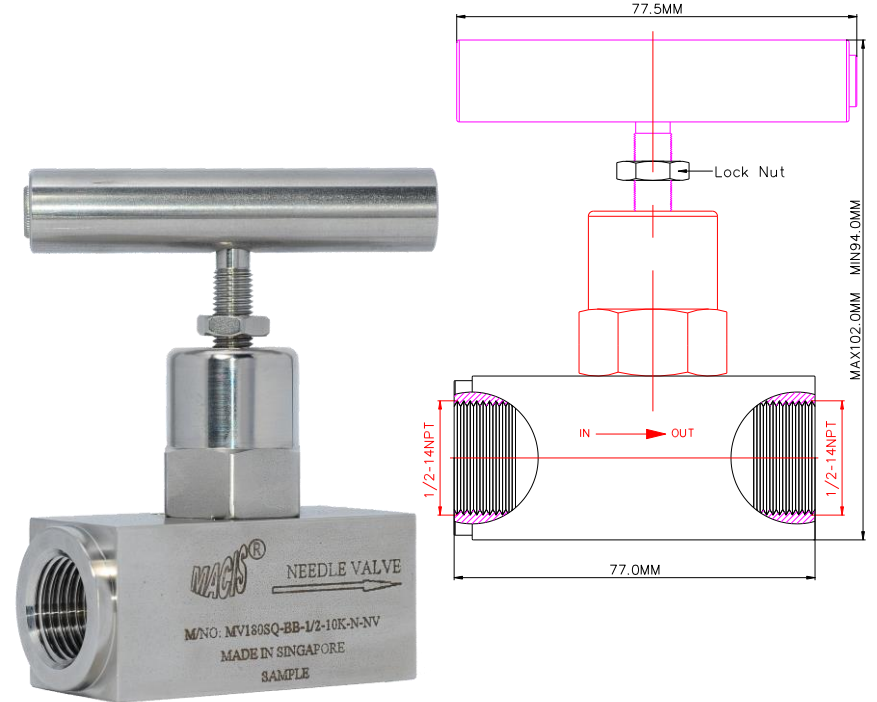

Ordering Ref : MV 180SQ-BB-1/2-10K-N-NV-H

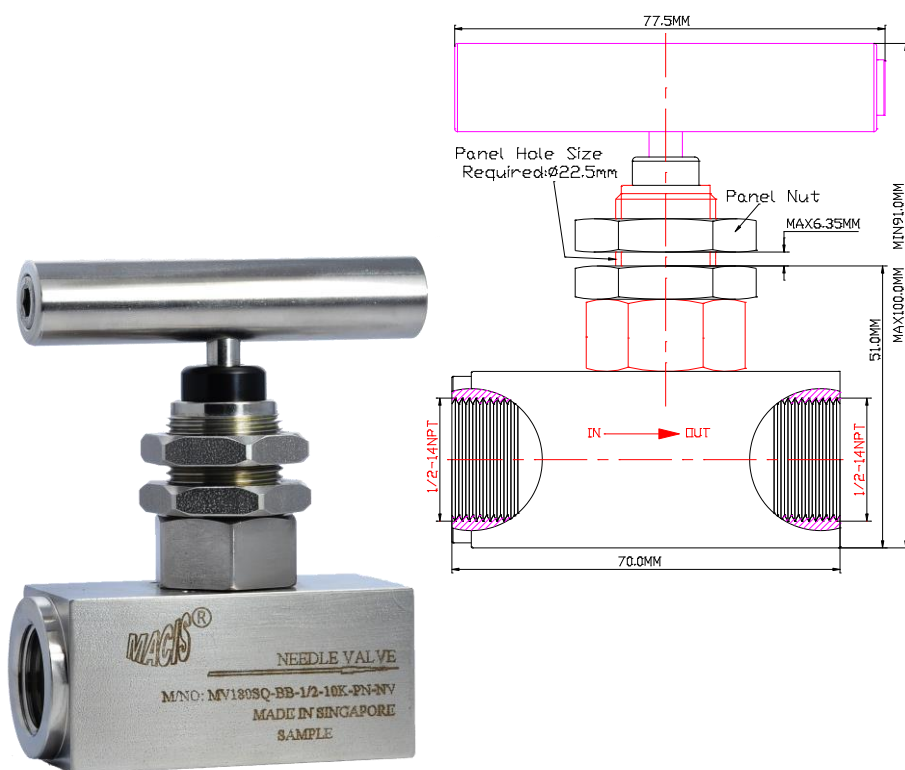

Ordering Ref : MV 180SQ-BB-1/2-10K-PN-NV-H

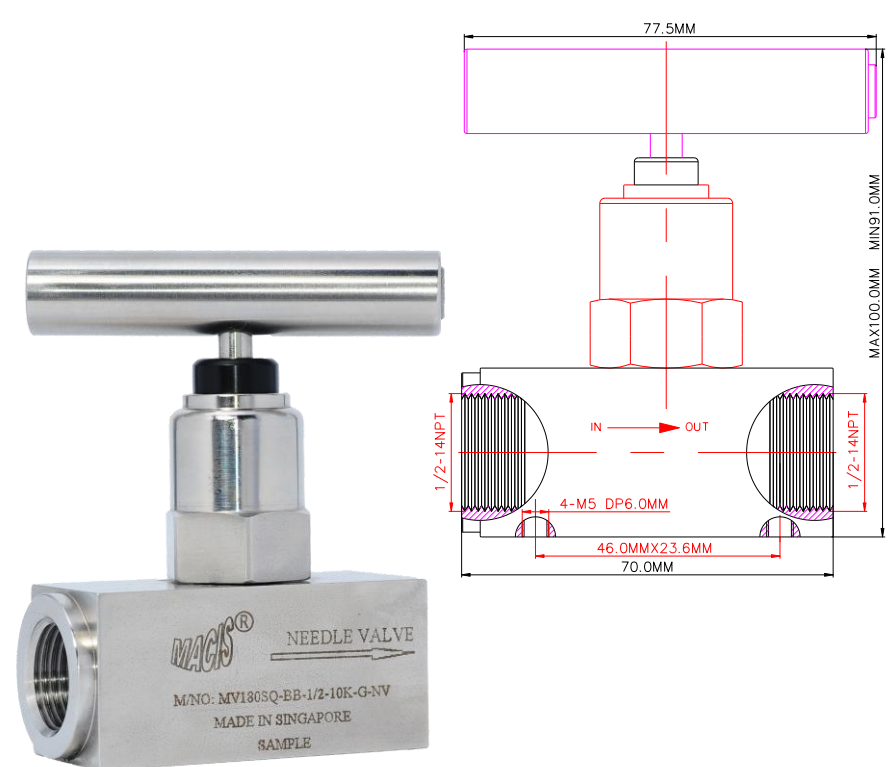

Ordering Ref : MV 180SQ-BB-1/2-10K-G-NV-H

Specification

Port Connection Size	IN Port: 1/2"-14NPT F OUT Port: 1/2"-14NPT F	<h3>Distinctions</h3> <table border="1"> <thead> <tr> <th>Ordering Ref No</th> <th>Net Weight</th> <th>Stem Seal</th> <th>Locknut</th> <th>Panel Hole</th> <th>Screw Hold</th> </tr> </thead> <tbody> <tr> <td>MV 180SQ-BB-1/2-10K-NV-H :</td> <td>700gm</td> <td>With</td> <td>Without</td> <td>Without</td> <td>Without</td> </tr> <tr> <td>MV 180SQ-BB-1/2-10K-N-NV-H :</td> <td>690gm</td> <td>Without</td> <td>With</td> <td>Without</td> <td>Without</td> </tr> <tr> <td>MV 180SQ-BB-1/2-10K-PN-NV-H :</td> <td>700gm</td> <td>With</td> <td>Without</td> <td>Ø 22.5mm(57/64")</td> <td>Without</td> </tr> <tr> <td>MV 180SQ- BB1/2-10K-G-NV-H :</td> <td>690gm</td> <td>With</td> <td>Without</td> <td>Without</td> <td>M5(DP 6.0mm) x 4</td> </tr> </tbody> </table>	Ordering Ref No	Net Weight	Stem Seal	Locknut	Panel Hole	Screw Hold	MV 180SQ-BB-1/2-10K-NV-H :	700gm	With	Without	Without	Without	MV 180SQ-BB-1/2-10K-N-NV-H :	690gm	Without	With	Without	Without	MV 180SQ-BB-1/2-10K-PN-NV-H :	700gm	With	Without	Ø 22.5mm(57/64")	Without	MV 180SQ- BB1/2-10K-G-NV-H :	690gm	With	Without	Without	M5(DP 6.0mm) x 4
Ordering Ref No	Net Weight		Stem Seal	Locknut	Panel Hole	Screw Hold																										
MV 180SQ-BB-1/2-10K-NV-H :	700gm		With	Without	Without	Without																										
MV 180SQ-BB-1/2-10K-N-NV-H :	690gm		Without	With	Without	Without																										
MV 180SQ-BB-1/2-10K-PN-NV-H :	700gm		With	Without	Ø 22.5mm(57/64")	Without																										
MV 180SQ- BB1/2-10K-G-NV-H :	690gm		With	Without	Without	M5(DP 6.0mm) x 4																										
Working Media	Oil																															
Max Working Pressure	10,000psi (689.4 bar)																															
Temperature Range	- 30°C to 120°C <i>Other Temperature Ranges available. Consult Factory</i>																															
Material(Valve Body)	316L																															
Exterior Shape	SQ 31.75mm×31.75mm(1 1/4" × 1 1/4")																															
Orifice Size	Ø6.5mm (1/4")																															
Seal Material	Nitrile Rubber (NBR) <i>Other Seal Material are Available Upon Request</i>																															
Flow Rate	Cv = 1.4																															
Options	Body Material and end connections other option available upon request																															

** Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.

MACIS PTE LTD

Blk 3015A Ubi Road 1, #01-02 & #01-06 Kampong Ubi Industrial Estate, Singapore 408705
Email : sales@macis.com.sg TEL : 65-6749 6011 / 65-6749 7882 FAX : 65-6749 1398