



# **NEEDLE VALVE** (Straight Pattern)

### **Descriptions**

The needle valve is used to make relatively fine adjustments in the amount of fluid flow. They are often used as component parts of other valves, to shut off the flow of the process media to the pressure instrument.

The characteristic of this value is the long, tapered, needle like point on the end of the value stem. This "needle" acts as a disk. The longer part of the needle is smaller than the orifice in the valve seat and passes through the orifice before the needle seats. This arrangement permits a very gradual increase or decrease in the size of the opening in a needle valve. Therefore, the valve can to provide fine flow adjustments. The number of handle turns can be directly correlated to the amount of flow.

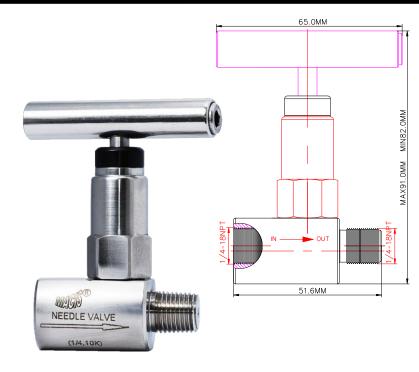

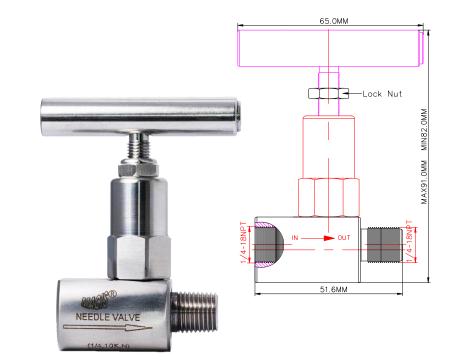

EEDLE VALVE


## Ordering Ref: MV 180-BA-1/4-10K-NV-H

Ordering Ref: MV 180-BA-1/4-10K-N-NV-H

#### **Specification**

opeenneaden					
Port Connection Size	IN Port:1/4"-18NPT F OUT Port: 1/4"-18NPT M	Distinctions			
Working Media	Oil				
Net Weight	300gm	Ordering Ref No	Stem Seal	<u>Locknut</u>	<u>Pa</u>
Max Working Pressure	10,000psi (689.4 bar)	MV 180-BA-1/4-10K-NV-H :	With	Without	,
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	MV 180-BA-1/4-10K-N-NV-H :	Without	With	,
Material(Valve Body)	316L	MV 180-BA-1/4-10K-PN-NV-H :	With	Without	Ø 19
Exterior Shape	Circular Ø28.0mm (1 <sup>7</sup> / <sub>64</sub> " )				
Orifice Size	Ø3.5mm ( <sup>9</sup> / <sub>64</sub> ")				
Seal Material	Nitrile Rubber (NBR) Other Seal Material are Available Upon Request				
Flow Rate	Cv = 0.5				
Options	Body Material and end connections other option available upon request				

\*\* Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.

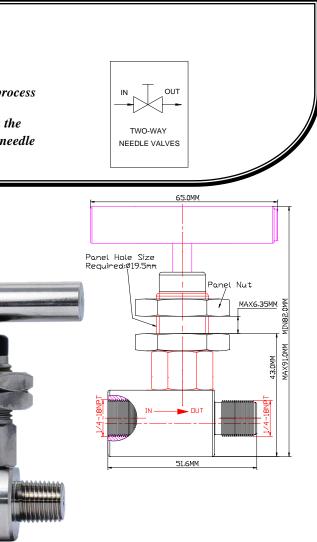

### Ordering Ref: MV 180-BA-1/4-10K-PN-NV-H

Panel Hole

Without

Without

19.5mm(49/64")