



www.macis.com.sg



## INDICATING VALVE (BYPASS)

### Valve Operation

When manually pushed in, the indicator appears **Green** showing normal status, the bypass inlet (B/I) will be block, and the signal inlet (S/I) connect to the outlet (OUT).

When manually pulled out, the indicator appears **Red** showing bypass status, the signal inlet (S/I) will be block, and the bypass inlet (B/I) connect to the outlet (OUT).

*\*Note: The valve is a non auto-reset function, it required to be manually push or pull to operate.*

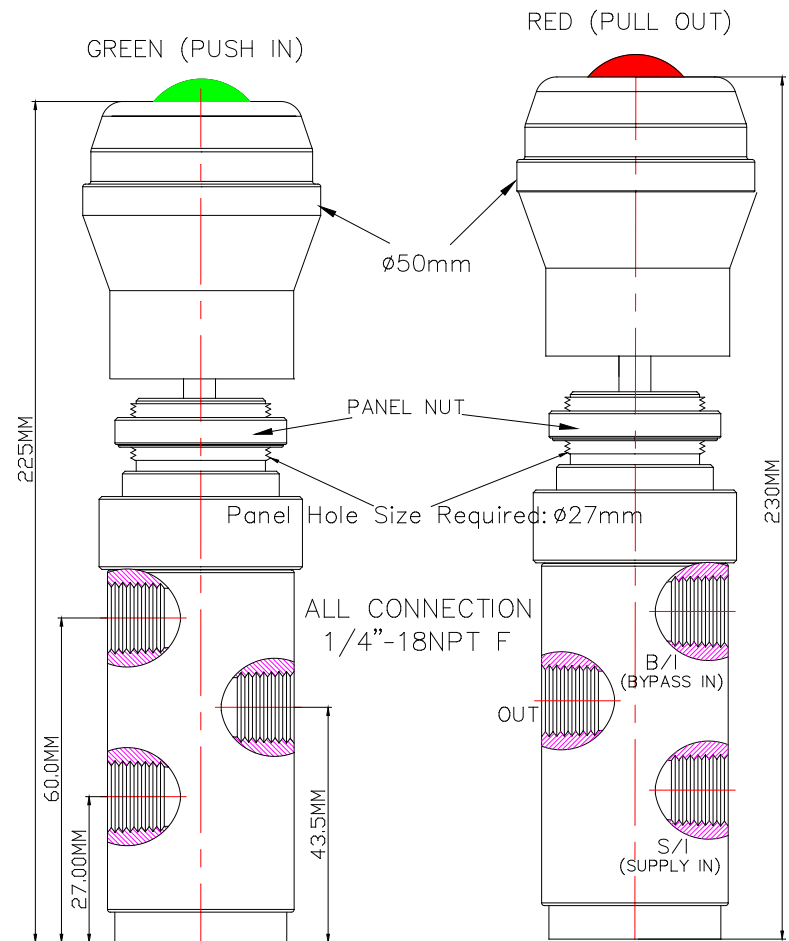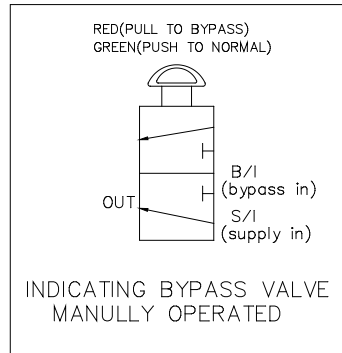

Ordering Ref : MV29176-I-NS-68L-B-D

### Specification

Control Application	3-Way 2-Position, Normally Closed 2-Color Indicating With Manual Operated Type
Port Connection Size	1/4"-18 NPT F
Panel Hole Size	Ø 27 mm (1 1/16")
Exterior Shape	Circular Ø 38.1 mm (1 1/2")
Net Weight	1.0kg
Working Media	Air
Max Working Pressure	200 PSI (13.7bar)
Temperature Range	- 30°C to 120°C <i>Other Temperature Ranges available. Consult Factory</i>
Material(Valve Body)	316 L
Seal Material(Standard)	Viton(FKM) <i>Other Seal Material are Available Upon Request</i>
Indicator	Standard Part
Color( Indicating )	Red & Green
Flow Rate	Cv = 1.6

**\*\* Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.**

MACIS PTE LTD

Blk 3015A Ubi Road 1, #01-02 & #01-06 Kampong Ubi Industrial Estate, Singapore 408705  
Email : [sales@macis.com.sg](mailto:sales@macis.com.sg) TEL : 65-6749 6011 / 65-6749 7882 FAX : 65-6749 1398