

## **RELIEF VALVE**

## Model: MV 9461C-10KL (Pressure Range 5,000-10,000psi)

## **Descriptions**

Relief valves (Pressure Safety Valves) are designed or set to open at a predetermined set pressure to protect other equipment from being subjected to pressures that exceed their design limits. The pressure media enters the relief valve, turning the spring housing clockwise will increase the relief valve pressure setting. Rotating the spring housing counterclockwise will decrease the relief valve pressure setting. When the set pressure is exceeded, the valve is forced open. They have excellent pressure relief and reset repeatability.

OUT

Port Connection Size: IN & OUT Ports 1/2"-14NPT F

Ordering Ref: MV9461C-10KL-I1/2NPTF-O1/2NPTF

provides easy external set pressure adjustment


naintains cap position ensuring set pressure

Lock nut

-Panel nut

- —Leak tight when 90% of "set pressure" is applied.
- —Repeatability ±5% of "set pressure".
- -Re-seating within 20-30% of "cracking pressure". State details when ordering



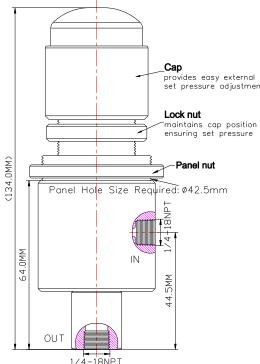


Ordering Ref: MV9461C-10KL-I1/4NPTF-O1/4NPTF

Correspondi

**Seal Material** 

**Options** 

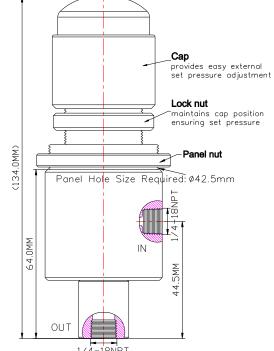

esponding to: MV 9462515-1/4-B-L		Corresponding to: MV 9462515-1/2-B-L
Specification		
Control Application	2-Way, Two Position Normally Closed, Spring / Poppet Operated Used to control or limit the pressure in a system	Distinctions
Pressure Range	5,000-10,000 PSI (344.8-689.4 bar)	Districtions
Orifice Size	Ø 2.4 mm( <sup>3</sup> / <sub>32</sub> " )	Ordering Ref No: MV 9461C-10KL-I1/4NPTF-O1/4NPTF
Flow Rate	Cv = 0.2	Ordering Ref No. 1919 9401C-10RL-11/4NPTP-O1/4NPTP
Panel Hole Size	Ø42.5mm (1 <sup>43</sup> / <sub>64</sub> " )	
Net Weight	1.1 kg	Port Connection Size: IN & OUT Ports 1/4"-18NPT F
Working Media	Air	
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	Ordering Ref No: MV 9461C-10KL-I1/2NPTF-O1/2NPTF
Material(Valve Body)	316 L	

Viton(FKM)

Other seal material are available upon request

Body Material and end connections other option available upon request

<sup>\*\*</sup>Optional Parts/Material are available upon request.