



NEEDLE VALVE (Straight Pattern)

Descriptions

The needle valve is used to make relatively fine adjustments in the amount of fluid flow. They are often used as component parts of other valves, to shut off the flow of the process media to the pressure instrument. The characteristic of this valve is the long, tapered, needle like point on the end of the valve stem. This "needle" acts as a disk. The longer part of the needle is smaller than the orifice in the valve seat and passes through the orifice before the needle seats. This arrangement permits a very gradual increase or decrease in the size of the opening in a needle valve. Therefore, the valve can to provide fine flow adjustments. The number of handle turns can be directly correlated to the amount of flow.



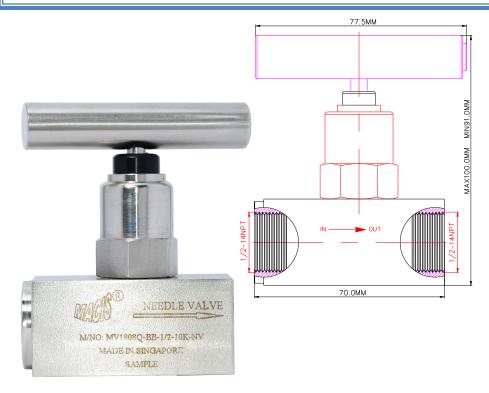

LOCK Nut

WO TOUN

LOW 1-2/
IN

OUT

LOW 1-2/
IN


77.0MM


NO. MYISSQ-BB-V2-10K-N-V

MADE IN SINGAPORE
SAMPLE

Ordering Ref: MV 180SQ-BB-1/2-10K-NV-L

Ordering Ref: MV 180SQ-BB-1/2-10K-N-NV-L

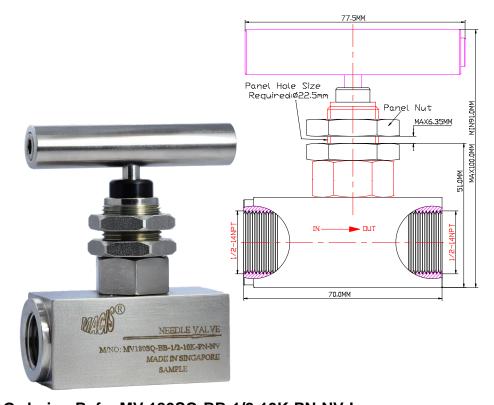

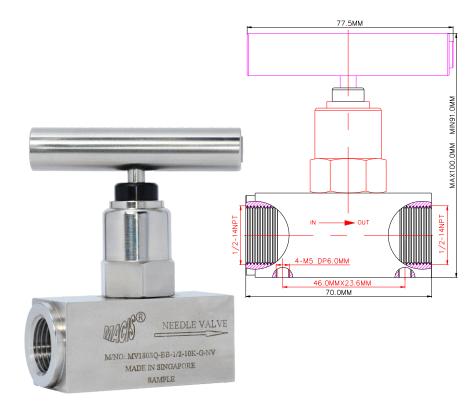

Ordering Ref: MV 180SQ-BB-1/2-10K-PN-NV-L

Ordering Ref: MV 180SQ-BB-1/2-10K-G-NV-L

Specification

оросиновичен				opcomoduon							
Port Connection Size	IN Port:1/2"-14NPT F OUT Port: 1/2"-14NPT F	Distinctions									
Working Media	Air	Ordering Ref No	Net Weight	Stem Seal	Locknut	Panel Hole	Screw Hold				
Max Working Pressure	10,000psi (689.4 bar)	MV 180SQ-BB-1/2-10K-NV-L :	700gm	With	Without	Without	Without				
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	MV 180SQ-BB-1/2-10K-N-NV-L :	•	Without	With	Without	Without				
Material(Valve Body)	316L	MV 180SQ-BB-1/2-10K-PN-NV-L	: 700gm	With	Without	Ø 22.5mm(57/64")	Without				
Exterior Shape	SQ 31.75mm×31.75mm(1 ¹ / ₄ " × 1 ¹ / ₄ ")	MV 180SQ- BB1/2-10K-G-NV-L	: 690gm	With	Without	Without	M5(DP 6.0mm) x 4				
Orifice Size	Ø6.5mm (¹ / ₄ ")										
Seal Material	Viton(FKM) Other Seal Material are Available Upon Request										
Flow Rate	Cv = 1.4										
Options	Body Material and end connections other option available upon request										

^{**} Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.