



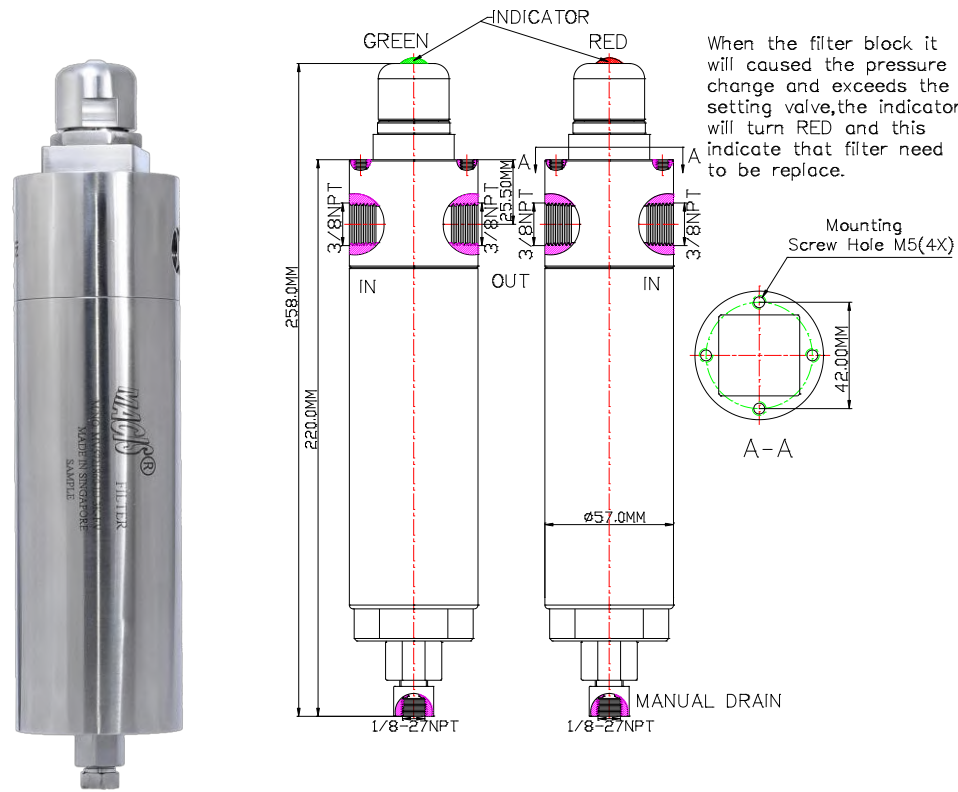


FILTERING VALVE (WITH INDICATOR)

Descriptions

MV 5721860-ID-6K / (10K)-FV is an oil filtering valve (with indicator), this type of valve is designed to show visually when a filter element must be changed or cleaned. The indicator will react to the increasing pressure differential caused by increasing contamination of the filter element. This function will be guarantee Operational safety and/or efficient utilization of a filter element.



Ordering Ref : MV 5721860-ID-6K-FV

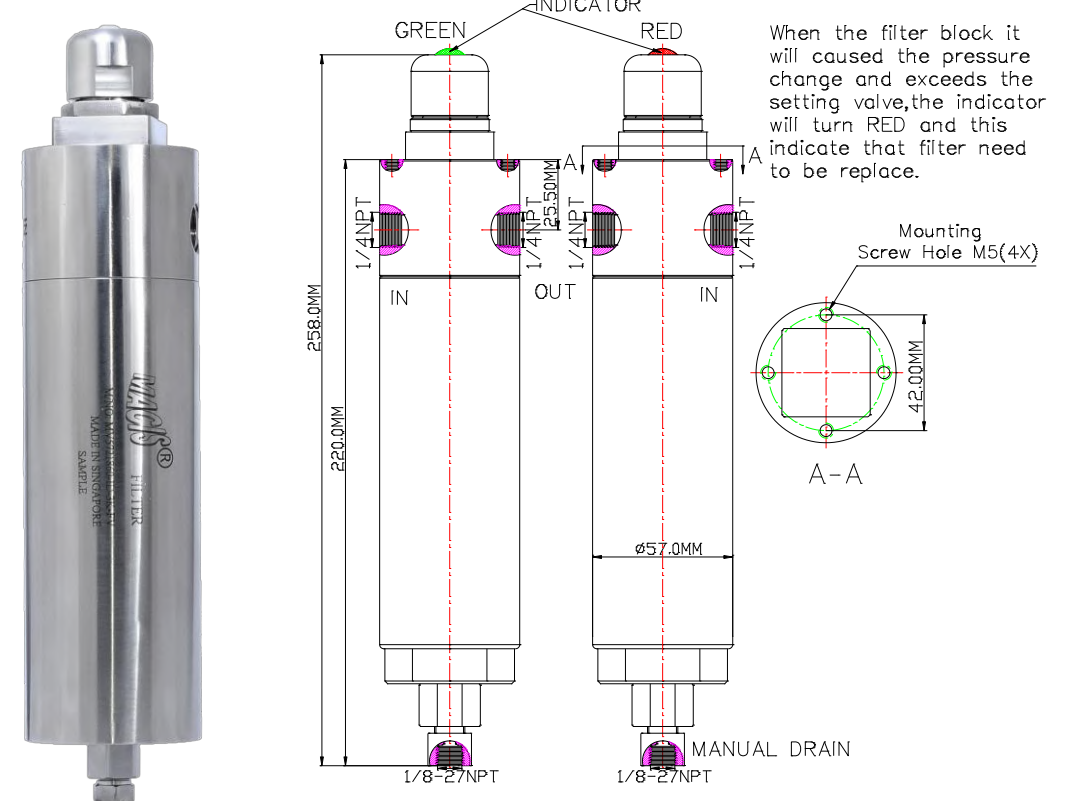

Ordering Ref : MV 5721860-ID-10K-FV

Specification

Working Media	Oil	Distinctions <table border="1"> <thead> <tr> <th>Ordering Ref No</th> <th>Port Connection Size</th> <th>Max Working Pressure</th> <th>Net Weight</th> <th>Orifice Size</th> <th>Flow Rate</th> </tr> </thead> <tbody> <tr> <td>MV 5721860-ID-6K-FV: IN & OUT Ports :3/8"-18NPT F , Release : 1/8"-27NPT F</td> <td></td> <td>6,000psi (413.7bar)</td> <td>2.8KG</td> <td>Ø7.8mm (9/32 ")</td> <td>Cv = 2.3</td> </tr> <tr> <td>MV 5721860-ID-10K-FV: IN & OUT Ports :1/4"-18NPT F , Release : 1/8"-27NPT F</td> <td></td> <td>10,000psi (689.4bar)</td> <td>3.0KG</td> <td>Ø6.0mm (15/64 ")</td> <td>Cv = 1.4</td> </tr> </tbody> </table>	Ordering Ref No	Port Connection Size	Max Working Pressure	Net Weight	Orifice Size	Flow Rate	MV 5721860-ID-6K-FV: IN & OUT Ports :3/8"-18NPT F , Release : 1/8"-27NPT F		6,000psi (413.7bar)	2.8KG	Ø7.8mm (9/32 ")	Cv = 2.3	MV 5721860-ID-10K-FV: IN & OUT Ports :1/4"-18NPT F , Release : 1/8"-27NPT F		10,000psi (689.4bar)	3.0KG	Ø6.0mm (15/64 ")	Cv = 1.4
Ordering Ref No	Port Connection Size		Max Working Pressure	Net Weight	Orifice Size	Flow Rate														
MV 5721860-ID-6K-FV: IN & OUT Ports :3/8"-18NPT F , Release : 1/8"-27NPT F			6,000psi (413.7bar)	2.8KG	Ø7.8mm (9/32 ")	Cv = 2.3														
MV 5721860-ID-10K-FV: IN & OUT Ports :1/4"-18NPT F , Release : 1/8"-27NPT F			10,000psi (689.4bar)	3.0KG	Ø6.0mm (15/64 ")	Cv = 1.4														
Filter Element Material	Stainless Steel <i>Other Material Are Available, Consult Factory</i>																			
Micron Rating	5 - 50 μ M(Microns)																			
Temperature Range	- 30°C to 120°C <i>Other Temperature Ranges available. Consult Factory</i>																			
Exterior Shape	CircularØ57.00mm(2 1/4 ")																			
Mounting Screw Hole (4×)	M5 (4X)																			
Material(Valve Body)	316 L																			
Seal Material	Nitrile Rubber <i>Other Seal Material are Available Upon Request</i>																			

** Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.

MACIS PTE LTD

Blk 3015A Ubi Road 1, #01-02 & #01-06 Kampong Ubi Industrial Estate, Singapore 408705
Email : sales@macis.com.sg TEL : 65-6749 6011 / 65-6749 7882 FAX : 65-6749 7882