





www.macis.com.sg


(BLOCK AND BLEED)GAUGE VALVE

Descriptions

(Block and bleed) gauge valves Usual are recommended for a variety of applications from economical gauge isolation valves, to rugged primary/root piping valves, and a block and bleed pressure relief.

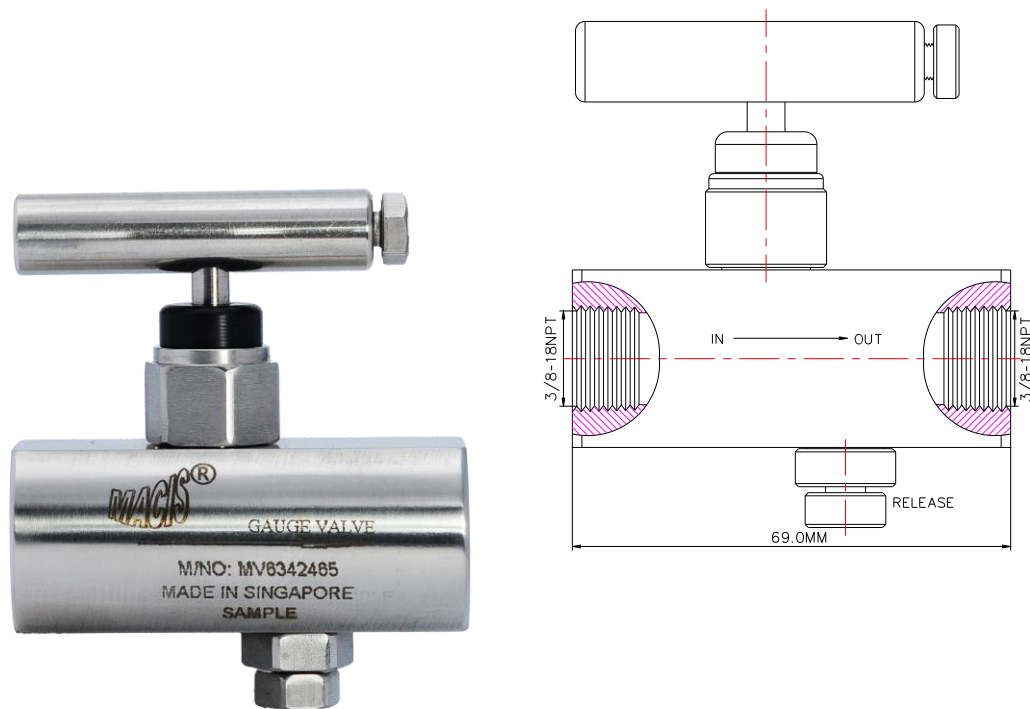

Ordering Ref : MV 6342465-H

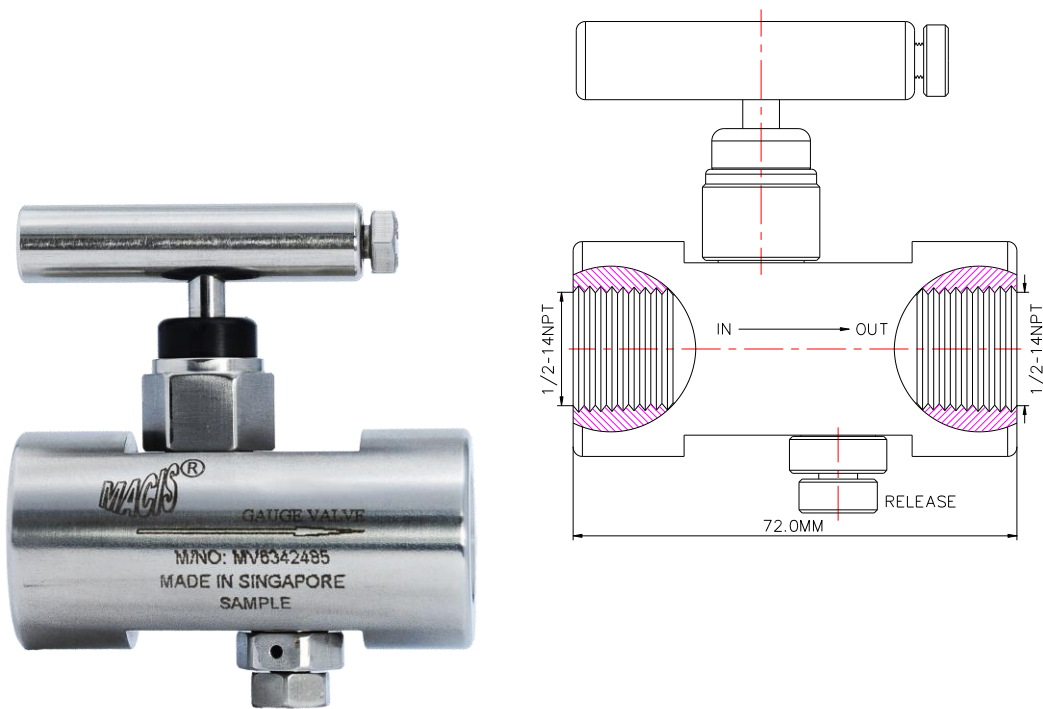

Ordering Ref : MV 6342485-H

Specification

Control Application	2-Way, manual operation Type Provides isolation and venting for Static pressure gauge and instrument installation.
Max Pressure Range	10,000psi (689.4 bar)
Net Weight	530 gm
Working Media	Oil
Temperature Range	- 30°C to 120°C <i>Other Temperature Ranges available. Consult Factory</i>
Exterior Shape	Circular Ø35.0mm(1 3/8 ")
Material(Valve Body)	316 L
Seal Material	Nitrile Rubber (NBR) <i>Other Seal Material Are Available Upon Request</i>
Options	Body Material and end connections other option available upon request

Distinctions

Ordering Ref No	Port Connection Size	Orifice Size	Flow Rate
MV 6342465-H :	IN & OUT Ports : 3/8"-18NPT (Taper) "F"	Ø3.0mm (1/8")	Cv = 0.3
MV 6342485-H :	IN & OUT PORTS : 1/2-14NPT (Taper) "F"	Ø4.0mm (5/32")	Cv = 0.65

** Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.

MACIS PTE LTD

Blk 3015A Ubi Road 1, #01-02 & #01-06 Kampong Ubi Industrial Estate, Singapore 408705
Email : sales@macis.com.sg TEL : 65-6749 6011 / 65-6749 7882 FAX : 65-6749 7882