WWW.macis.com.sg (PUSH TO ACTUATE) IN NORMALLY CLOSED MANUAL CHECK VALVE

VELOCITY CHECK VALVE


Valve Operation

MV1586779L-A is a Velocity Manual Check Valve, it is to provide positive flow shut off in the event of an abnormal flow thru pressure differential. To open the valve, manually push the palm button until the pressure equalizes on both sides and allow the spool to stay at the in position, as status table on state 2.

Releasing the palm button, the valve will still stay at in position unless the palm button is manually pull to allow the valve and ball check to it position, the pressure flow from OUT port to IN port, pressure loss in the downstream of the OUT port will causes the valve to trip as status table on state 1.

Flow Control status Table

STATE	IN	OUT	Palm Button
1	-	0	pull
2	0	0	PUSH

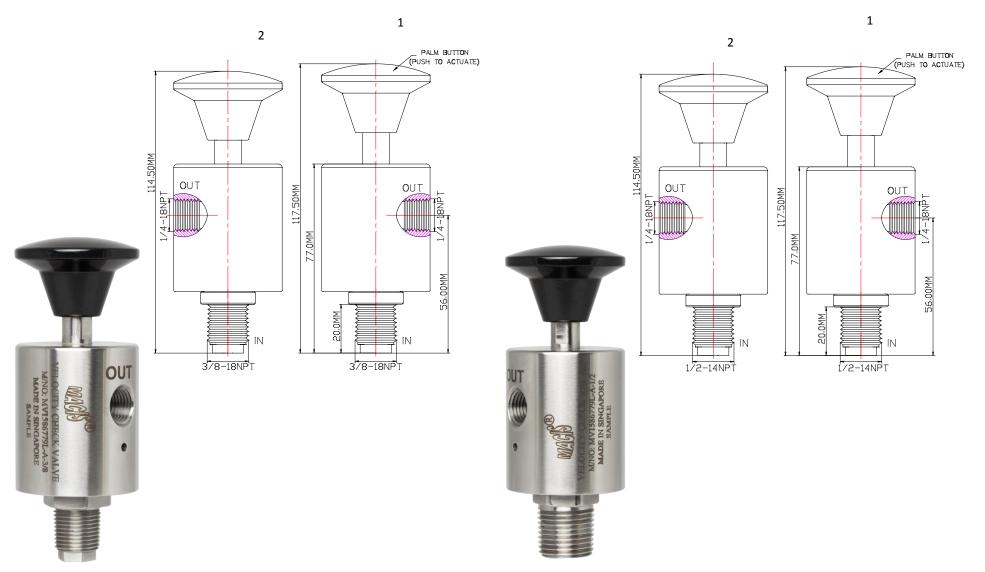

Ordering Ref : MV1586779L-A-3/8 Ordering Ref : MV1586779L-A-1/2

Specification

Control Application	2-Way Normally Closed Velocity Check Valve with Manual Palm Button Type	Distinctions
Exterior Shape	Circular Ø44.00 mm (1 ⁴⁷ / ₆₄ ")	Ordering Ref No : MV 1586779L-A-3/8
Net Weight	1.0 Kg	
Working Media	Air	Port Connection Size: IN Port: 3/8"NPT M, OUT Port: 1/4" NPT F
Max Working Pressure	10,000 PSI (689.4bar)	
Operating Pressure (Palm Button)	0-2,000PSI(0-137.9bar)	Ordering Ref No: MV 1586779L-A-1/2
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	Port Connection Size: IN Port: 1/2" NPT M , OUT Port: 1/4" NPT F
Material(Valve Body)	316 L	
Seal Material	Viton(FKM) Other Seal Material are Available Upon Request	
Material (Palm Button)	Polyamide Other Material are Available Upon Request	
Flow Rate	Cv = 0.35	

^{**} Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.