



www.macis.com.sg


MANUAL OPERATED VALVE

Valve Operation

MV29179-S55L-SPB-PS-C & MV29179-N55L-SPB-PS-C are 3 Way 2-Position, Normally closed, manual push to actuate manual operated valves, auto reset type (Unguarded, plain button with spring return).


To open the valve, push the plain button to actuate, supply pressure from IN port to OUT port and block at EX port, the valve as per status table (State 2).

To close the valve, release the plain button, the valve will spring return to close as per status table (state 1). The IN port will be block, and the working pressure will vent from OUT port to EX port.




Flow Control Status Table

STATE	IN	OUT	EX	Plain Button
1	-	O	O	Release
2	O	O	-	Push

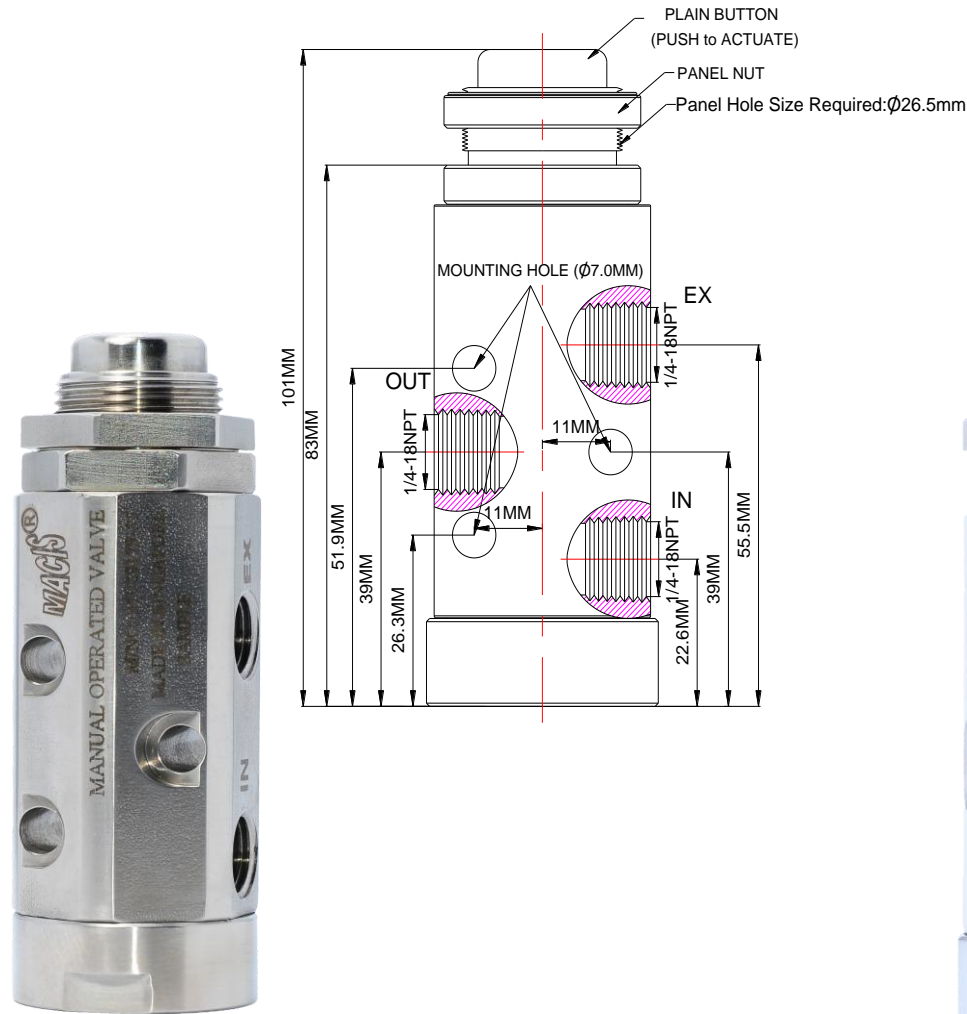

Ordering Ref : MV29179-S55L-SPB-PS-C
Corresponding to: MV2917955

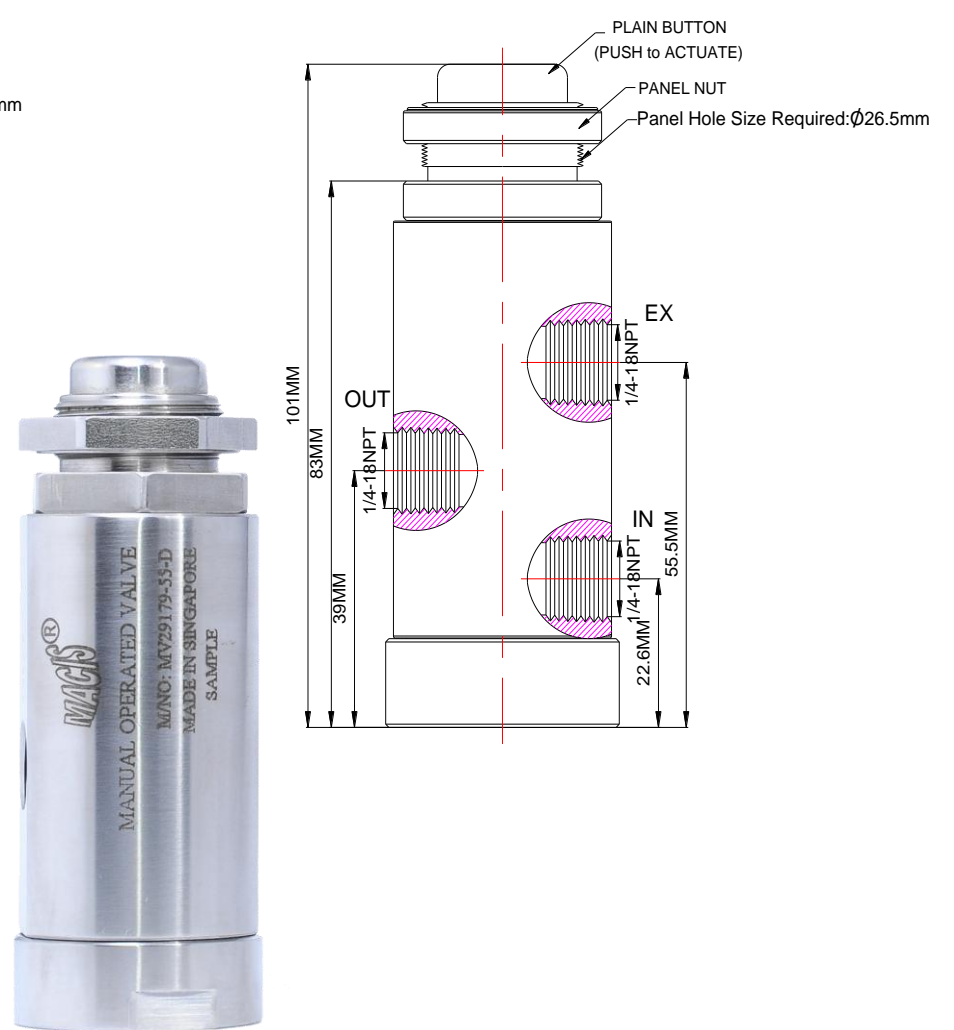

Ordering Ref : MV29179-N55L-SPB-PS-C
Corresponding to: MV2917955-D

Specification

Control Application	3-Way 2-Position Normally Closed Manual Push to Actuate Auto Reset Type(Unguarded, Plain button with spring return)	Distinctions
Port Connection Size	1/4" NPT F	
Net Weight	700 gm	Ordering Ref No
Panel Hole Size	$\varnothing 26.5\text{mm}$ ($1 \frac{3}{64}$ ")	Exterior Shape
Working Media	Air	Mounting Hole
Max Working Pressure	200 PSI (13.7bar)	MV29179-S55L-SPB-PS-C : Hexagon A/ F 34.9mm ($1 \frac{3}{8}$ ")
Temperature Range	- 30°C to 120°C <i>Other Temperature Ranges available. Consult Factory</i>	MV29179-N55L-SPB-PS-C : Circular $\varnothing 38.1$ mm ($1 \frac{1}{2}$ ")
Material(Valve Body)	316L	Without
Seal Material	Viton(FKM) <i>Other Seal Material Are Available Upon Request</i>	
Flow Rate	Cv = 1.6	

** Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.

MACIS PTE LTD

Blk 3015A Ubi Road 1, #01-02 & #01-06 Kampong Ubi Industrial Estate, Singapore 408705
Email : sales@macis.com.sg TEL : 65-6749 6011 / 65-6749 7882 FAX : 65-6749 1398