## WWW.macis.com.sg (PUSH TO ACTUATE) IN NORMALLY CLOSED MANUAL CHECK VALVE

## **VELOCITY CHECK VALVE**

## Valve Operation


Velocity Manual Check Valve (MV1586778H) is to provide positive flow shut off in the event of an abnormal flow thru pressure differential. To open the valve, push down the manual lever until the pressure equalizes on both sides (Input & Output) and allow the spool to stay at the in position, as status table on state 2.

Release the manual lever, the spring return valve and the ball check to it position, the pressure flow from OUT port to IN port. Pressure loss in the downstream of the OUT port will causes the valve to trip as status table on state 1.

This type valve also being use with independent operation system, such as LPO (Line Pressure Operate) systems. They provide both the pressure shut off response and the manual reset feature required by LPO systems.

## Flow Control Status Table

STATE	IN	OUT	MANUAL LEVER
1	-	0	Release
2	0	0	Push Down

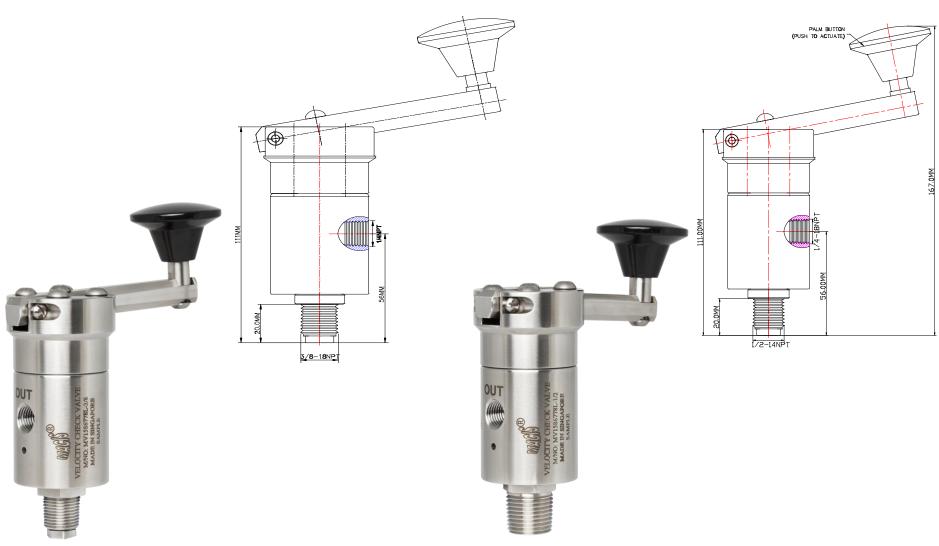

Ordering Ref: MV1586778H-3/8 Ordering Ref: MV1586778H-1/2

Specification

Control Application	2-Way Normally Closed  Velocity Check Valve with Manual Lever Type	Distinctions
Exterior Shape	Circular Ø44.00 mm (1 <sup>47</sup> / <sub>64</sub> " )	Ordering Ref No : MV 1586778H-3/8
Net Weight	1.2 kg	
Working Media	Oil	Port Connection Size: IN Port: 3/8"NPT M, OUT Port: 1/4" NPT F
Max Working Pressure	10,000 PSI (689.4bar)	
Operating Pressure (Manual Lever)	0-10,000PSI( 0-689.4bar)	Ordering Ref No: MV 1586778H-1/2
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	Port Connection Size: IN Port: 1/2" NPT M , OUT Port: 1/4" NPT F
Material(Valve Body)	316 L	,
Seal Material	Nitrile Rubber(NBR) Other Seal Material are Available Upon Request	
Material (Palm Button)	Polyamide Other Material are Available Upon Request	
Flow Rate	Cv = 0.35	

<sup>\*\*</sup> Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.