



www.macis.com.sg

PILOT VALVE (Manual Reset Type)

Valve Operation

MV29176-SP-55H-D-MO-A & MV29178-SP-55H-D-MO-A are 3 Way 2-Position, Universal operation, Manual palm button. air latch pilot with spring return pilot valves. Manual reset type.

To open the valve, supply signal pressure to Pilot port (within the required minimum pilot pressure range) and manually pull the palm button to actuate, the valve as per below control table (state1), the P2 port will open to OUT port and P1 port will be block. Once Pulling palm button outward and applied pilot signal pressure, the valve's normal in-service placement will be maintained.


To close the valve, when the pilot port signal pressure drop to lower than 18psi (1.2bar), the valve will spring return to close as per below control table (state 2), the P1 port will open to OUT port and P2 port will be block.

*Note: 1. Palm button cannot push to close the valve when the Pilot port signal pressure is within the required minimum pilot pressure range.

2. Valve is a universal operation, when select P2 port as IN port, the valve is normally closed. When select P1 port as IN port the valve is normally open.

3. When the Pilot signal pressure drop within 6 to 18psi, the valve will spring to close, reintroduction of the pilot signal pressure to the required min. pilot pressure, the valve will auto reset to open without pulling the palm button. The valve required to manually pull to open is only when the pilot signal pressure drop to lower than 5psi (0.34bar).

4. If P1 or P2 port use as the exhaust, the backpressure cannot exceed more than 5psi (0.34bar)




Flow Control Table


STATE	P1	P2	OUT	PILOT	Palm Button
1	-	O	O	O	PULL
2	O	-	O	-	-



Ordering Ref : MV29176-SP-55H-D-MO-A

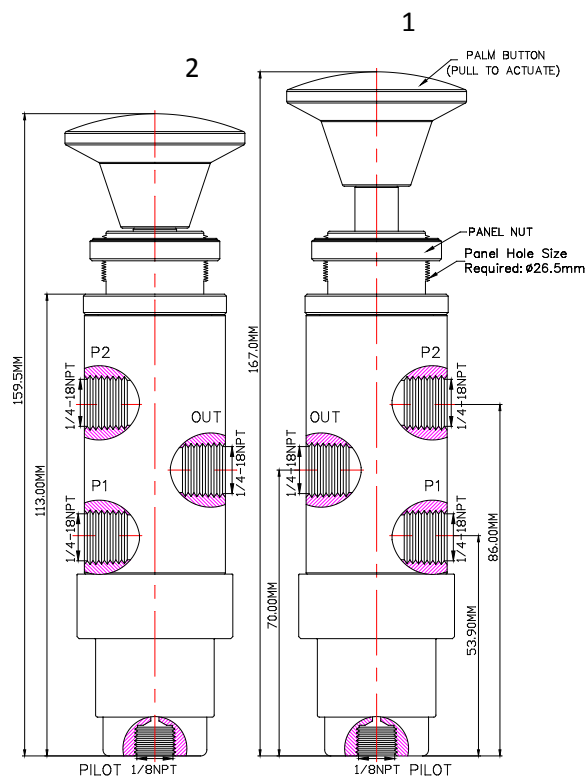

Ordering Ref : MV29178-SP-55H-D-MO-A

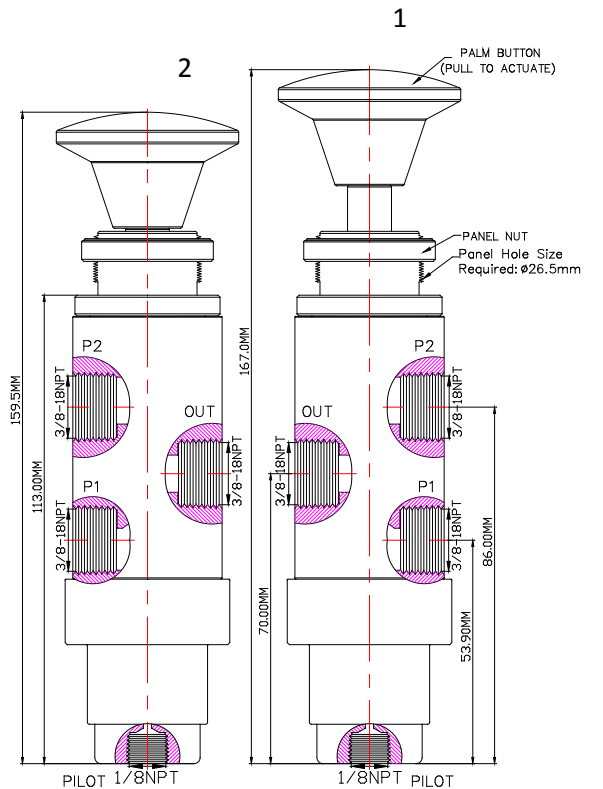

Specification

Control Application	3-Way 2-Position, Universal Operation, Manual Palm Button, Air Latch Pilot with Spring Return, Manual Reset Type
Net Weight	900 gm
Panel Hole Size	Ø 26.5mm (1 ³ / ₆₄ ")
Working Media	Oil
Pilot Pressure Range	38 - 300 PSI (2.6 – 20.6 bar)
Max Working Pressure	300 PSI (20.6bar)
Temperature Range	- 30°C to 120°C <i>Other Temperature Ranges available. Consult Factory</i>
Material(Valve Body)	316 L
Seal Material	Nitrile Rubber (NBR) <i>Other Seal Material Are Available Upon Request</i>
Material(Palm Button)	Polyamide <i>Other Material Are Available Upon Request</i>
Flow Rate	Cv = 1.65

Distinctions

Ordering Ref No	Port Connection Size	Exterior Shape
MV29176-SP-55H-D-MO-A :	P1 ,P2 & OUT Ports : 1/4"NPT F, Pilot Port : 1/8"NPT F	Circular Ø 38.1 mm (1 ¹ / ₂ ")
MV29178-SP-55H-D-MO-A :	P1 , P2 & OUT Ports : 3/8"NPT F, Pilot Port : 1/8NPT F	Circular Ø 40.0mm (1 ³⁷ / ₆₄ ")

** Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.

MACIS PTE LTD

Blk 3015A Ubi Road 1, #01-02 & #01-06 Kampong Ubi Industrial Estate, Singapore 408705
Email : sales@macis.com.sg Tel : 65-67490 6011 / 65-6749 7882 FAX : 65-6749 1398