



NEEDLE VALVE (Straight Pattern)


Descriptions


The needle valve is used to make relatively fine adjustments in the amount of fluid flow. They are often used as component parts of other valves, to shut off the flow of the process media to the pressure instrument.

The characteristic of this valve is the long, tapered, needle like point on the end of the valve stem. This "needle" acts as a disk. The longer part of the needle is smaller than the orifice in the valve seat and passes through the orifice before the needle seats. This arrangement permits a very gradual increase or decrease in the size of the opening in a needle valve. Therefore, the valve can to provide fine flow adjustments. The number of handle turns can be directly correlated to the amount of flow.



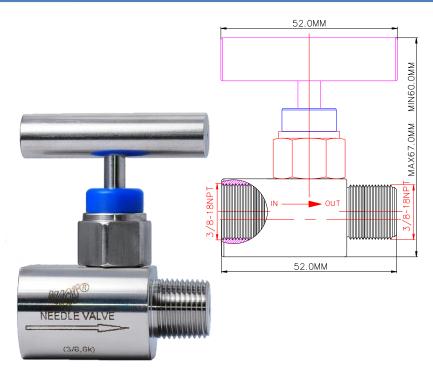

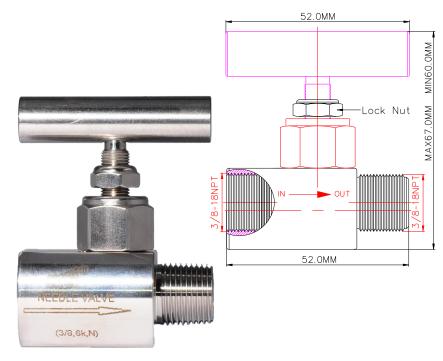

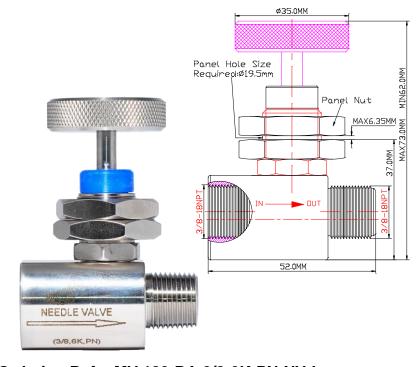

Ordering Ref: MV 180-BA-3/8-6K-NV-L

Ordering Ref: MV 180-BA-3/8-6K-N-NV-L

Ordering Ref: MV 180-BA-3/8-6K-PN-NV-L

Specification

Port Connection Size	IN Port:3/8"-18NPT F OUT Port: 3/8"-18NPT M				
Working Media	Air				
Max Working Pressure	6,000psi (413.7 bar)				
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory				
Material(Valve Body)	316L				
Exterior Shape	Circular Ø31.0mm (1 ⁷ / ₃₂ ")				
Orifice Size	Ø4.2mm (¹¹ / ₆₄ ")				
Seal Material	Viton(FKM) Other Seal Material are Available Upon Request				
Flow Rate	Cv = 0.7				
Options	Body Material and end connections other option available upon request				

Distinctions

Ordering Ref No	Net Weight	Stem Seal	<u>Locknut</u>	Panel Hole
MV 180-BA-3/8-6K-NV-L:	280gm	With	Without	Without
MV 180-BA-3/8-6K-N-NV-L:	280gm	Without	With	Without
MV 180-BA-3/8-6K-PN-NV-L:	340gm	With	Without	Ø 19.5mm(49/64")

^{**} Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.