


### www.macis.com.sg




# **INTERFACE VALVE**

## Valve Operation

MV B29A-PL10K3W-1/4NC-1/4E-1/4P-N- L & MV B29APL10K3W-3/8NC-3/8E-1/4P-N-L are 3-Way 2-Position Normally Closed Auto Operation Interface Valve. Working pressure need to be applied at the Pilot Port for it to operate. To open the valve, the pressure signal to Pilot port within the required minimum pilot pressure range, the valve will actuate to open supply pressure from IN port to OUT port and block at EX port, as per below Status table State 1. To close the valve, the Pilot port pressure lower than Min pilot operating pressure, the valve will be auto reset to close as per below status table State 2. Supply pressure will be block at IN port and accumulated operating pressure will released through the EX port.

### Flow Control Status Table

STATE	IN	OUT	EX	PILOT
1	0	0	-	0
2	-	o	0	-

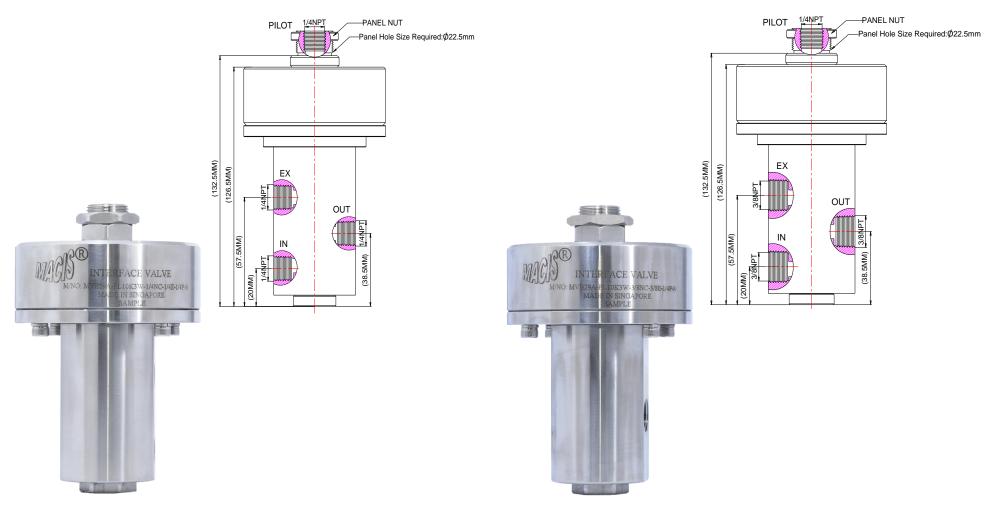

Ordering Ref: MV B29A-PL10K3W-1/4NC-1/4E-1/4P-N-L Ordering Ref: MV B29A-PL10K3W-3/8NC-3/8E-1/4P-N-L

## Specification

Specification		
Control Application	3-Way 2-Position Normally Closed Auto Operation Type	Distinctions
Pilot Linker Shape	Circular Ø95.2mm ( 3 $^3/_4$ ")	Ordering Ref No: MV B29A-PL10K3W-1/4NC-1/4E-1/4P-N-L
Net Weight	2.6 KG	
Working Media	Air	Port Connection Size: IN , OUT & EX Ports: 1/4"NPT F, Pilot Port: 1/4"NPT F
Pilot Pressure Range	15 - 60 PSI (1.1 – 4.1 bar)	
Max Working Pressure	10,000 PSI (689.4 bar)	
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	Ordering Ref No: MV B29A-PL10K3W-3/8NC-3/8E-1/4P-N-L
Material(Valve Body)	316L	Port Connection Size: IN , OUT & EX Ports: 3/8"NPT F, Pilot Port: 1/4"NPT F
Seal Material	Viton(FKM) Other Seal Material are Available Upon Request	
Mounting Hole Size	Ø22.5 mm ( <sup>57</sup> / <sub>64</sub> ")	
Flow Rate	Cv = 0.65	

<sup>\*\*</sup> Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.