



## **BLEEDER VALVE**


### **Descriptions**

Bleeder valves are used on instrument fluid handling products, such as manifolds or gauge/root valves. The valve is utilizes miniature valve bonnet technology, the bonnet and seat are integrated with a hex plug body to produce a bleeder valve that to provides an economic means to bleed process pressure trapped between the (multi-port) gauge valve and instrument

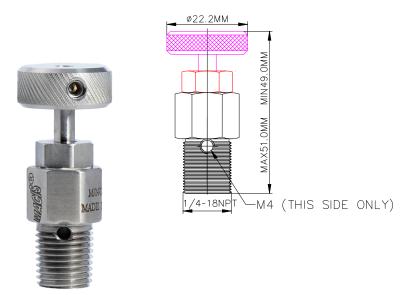


Ordering Ref: MV 6343605-L

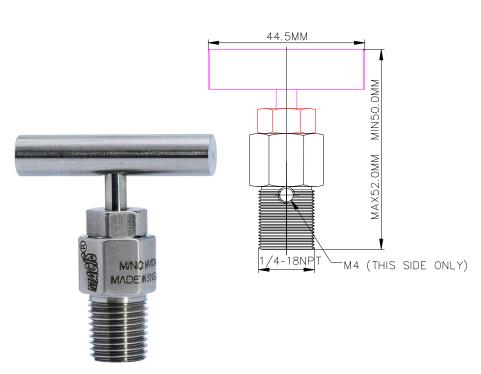

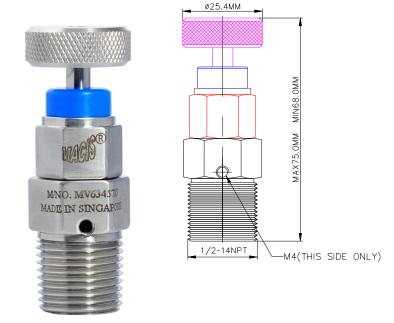

Ordering Ref: MV 6345785-L

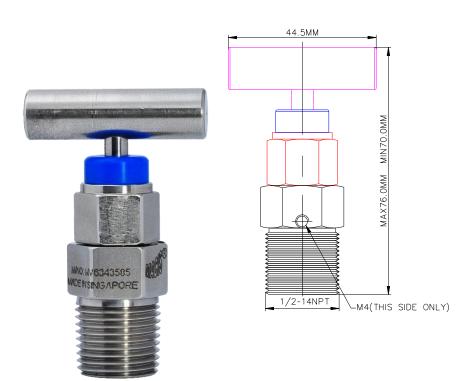

Ordering Ref: MV 6343585-L

# Specification Control Application Provide to vent signal line pressure before disassembling of an instrument or facilitate in calibration of control devices Distinctions Ordering Ref No Port Connection Size Net Weight

### Ordering Ref: MV 6343505-L

Working Media	Air	MV 6343605-L :	¼"-18NPT M	65gm
Temperature Range	- 30°C to 120°C Other Temperature Ranges available. Consult Factory	MV 6345785-L:	½"-14NPT M	165gm
		MV 6343505-L:	¼"-18NPT M	65gm
Material(Valve Body)	316 L	MV 6343585-L:	½"-14NPT M	165gm
Orifice Size	Ø3.0mm( <sup>1</sup> / <sub>8</sub> " )			
Seal Material	Viton Other Seal Material Are Available Upon Request			
Flow Rate	Cv = 0.35			

\*\*Measurement stated are with tolerance of +/-10%. Optional Parts/Material are available upon request.

#### MACIS PTE LTD

Blk 3015A Ubi Road 1, #01-02 & #01-06 Kampong Ubi Industrial Estate, Singapore 408705

Email : sales@macis.com.sg TEL : 65-6749 6011 / 65-6749 7882 FAX : 65-6749 1398